
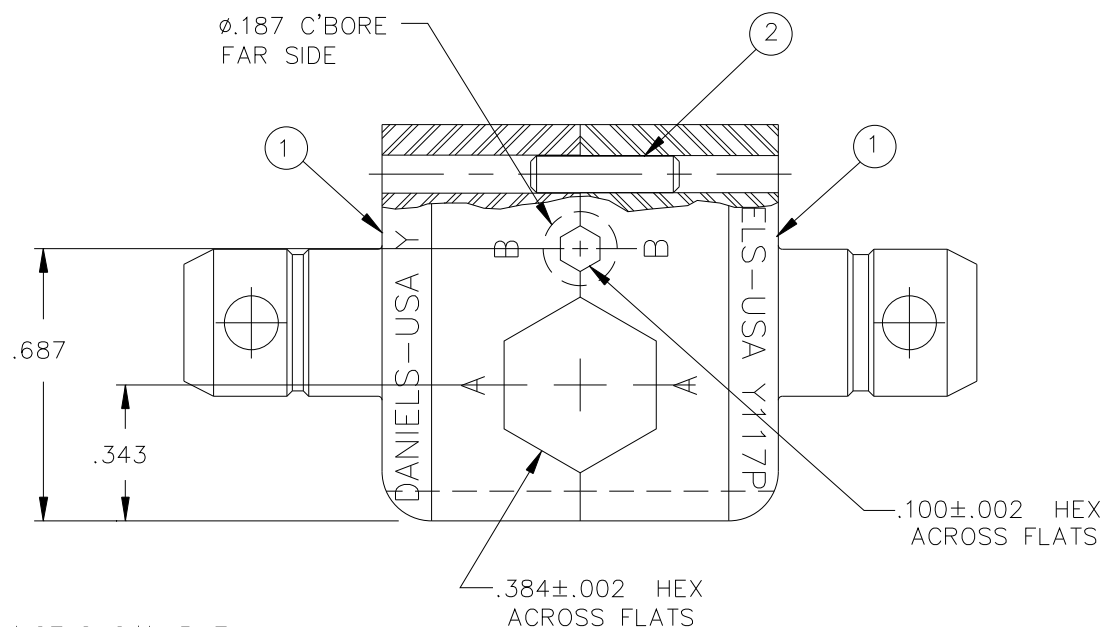


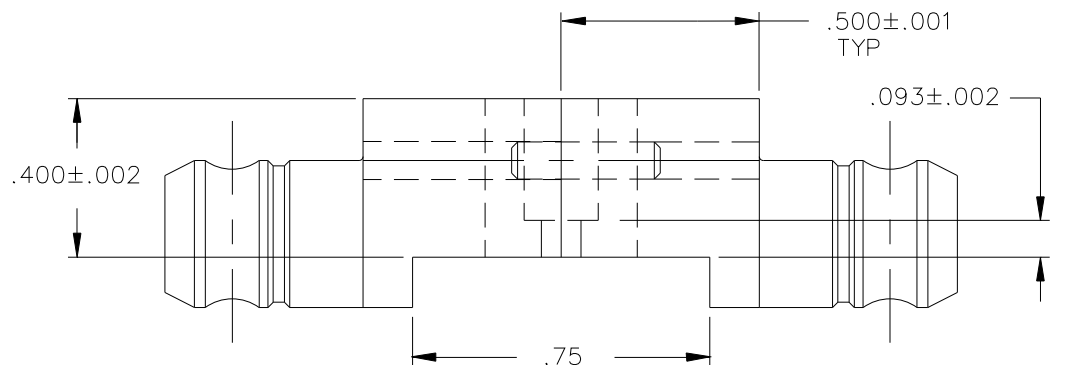

4. ITEMS 3 AND 4 NOT SHOWN BUT SHIPPED WITH DIE SET.
3. PERMANENTLY MARK AS SHOWN, 1/16 HIGH CHARACTERS.
2. OPPOSING CRIMPING CAVITIES MUST ALIGN WITHIN .002 .
1. CRIMPING SURFACES TO BE $\sqrt{63}$.

NOTES:

REVISIONS				
REV. SYM.	E.C.O. NUMBER	DESCRIPTION	BY DATE	APP'D DATE
H	13077	UPDATE & REDRAWN	DUNG CAO 6-23-95	DE 7-11-95

4	6-1011	1	Ø1/8 X 3/4 SPRING PIN
3	6-1010	1	Ø1/8 X 1/2 SPRING PIN
2	6-1036	1	Ø3/32 X 3/8 DOWEL PIN
1	HX4-1064BK	1	PINNED DIE BLANK SET

RESTRICTED & CONFIDENTIAL CONFIDENTIAL PROPERTY OF DANIELS MANUFACTURING CORP. NOT TO BE DISCLOSED TO OTHERS, REPRODUCED OR USED FOR ANY OTHER PURPOSE, EXCEPT AS AUTHORIZED IN WRITING BY DANIELS MANUFACTURING. MUST BE RETURNED TO DANIELS MANUFACTURING CORP. ON COMPLETION OF ORDER OR OTHER PURPOSE FOR WHICH LENT.		MATERIAL		ITEM	PART NO.		QTY.	DESCRIPTION/REMARKS			
		(OHTS-06)		DRN.	DUNG CAO		DATE	 DANIELS MANUFACTURING CORP. ORLANDO, FLORIDA CAGE 11851			
		HEAT TREAT		CHK'D.	DE	DATE					
				APP'D.	DD	DATE					
				APP'D.		DATE					
				HRC 52-55		TOLERANCE:				WHERE USED:	
DO NOT SCALE DRAWING		FINISH BLACK OXIDE MIL-C-13924		UNLESS OTHERWISE SPECIFIED FRACTIONS±1/32 ANGLES±1/2° DECIMALS: .X: ±.020 .XX: ±.010 .XXX: ±.005 .XXXX: ±.0005 REMOVE BURRS & BREAK SHARP EDGES .005-.015			SIZE	SCALE	CAD P/N	SHEET	OF
				B	3X	Y117P	1	1			
				POSTING	P/N		Y117P	REV.			
										H	