


REVISIONS						
REV	ECO NO.	DESCRIPTION	BY	DATE	APP'D BY	DATE
1		ORIGINAL RELEASE	K. KOONS	1/27/2011	D. EBY	1/27/2011
2		REDRAWN	K. KOONS	3/7/2025		

P/N 12-4040 HYDRAULIC HOSE

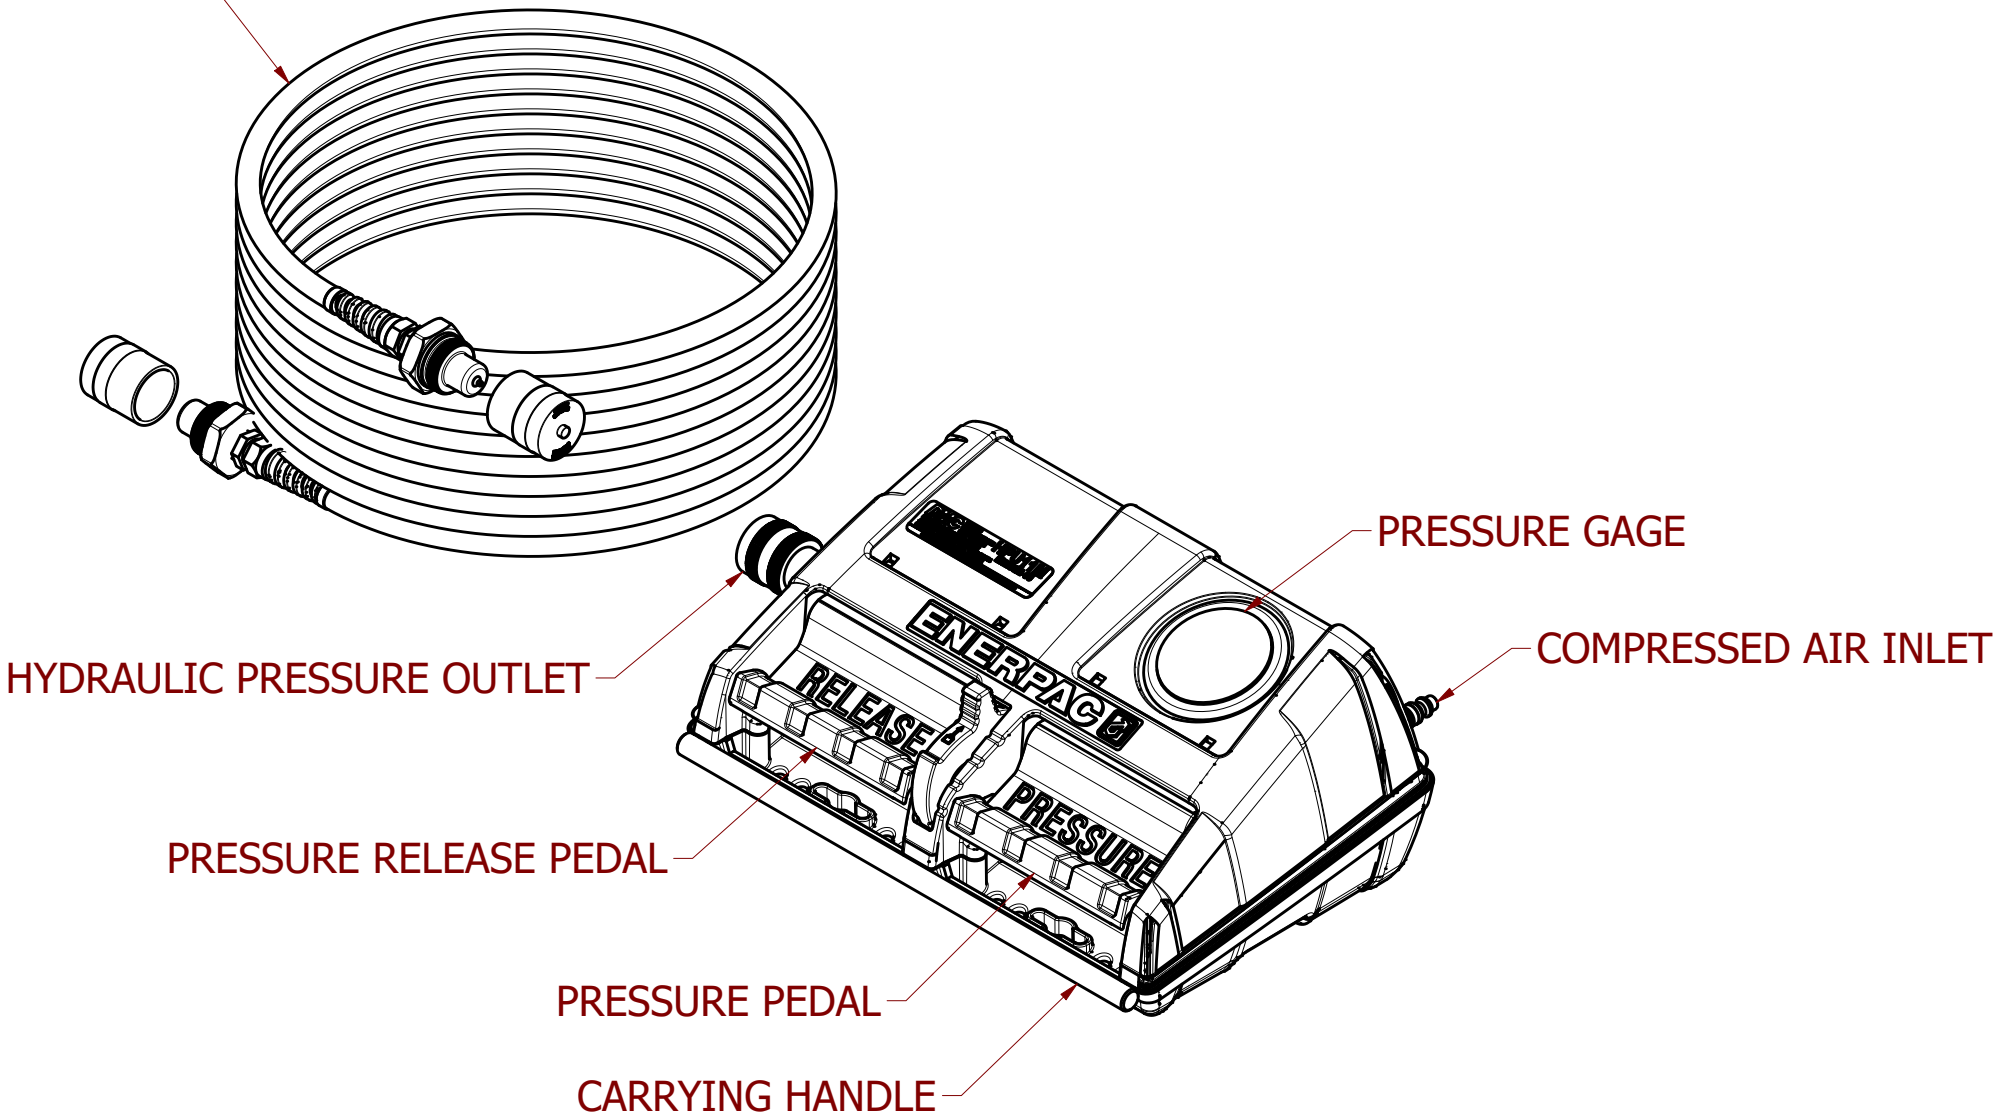

USABLE OIL CAPACITY = 61in³
PRESSURE GAUGE = 0-10,000psi (700bar)
VALVE TYPE = 3-WAY, 3-POSITION
VALVE FUNCTION = ADVANCE, HOLD, RETRACT
L x W x H = 11 x 16.5 x 6.0
WEIGHT = 19.4lb
MAXIMUM PRESSURE = 10,000psi (700bar)
FLOW RATE = 120in³/min (NO LOAD) & 15in³/min (LOAD)
INPUT AIR PRESSURE RANGE = 30 - 125psi

NOTES:

UNCONTROLLED DOCUMENT

WILL NOT BE UPDATED

DIMENSIONS IN INCHES - UNLESS OTHERWISE SPECIFIED

RESTRICTED & CONFIDENTIAL

CONFIDENTIAL PROPERTY OF DANIELS MANUFACTURING CORP. NOT TO BE DISCLOSED TO OTHERS. REPRODUCTION OR USED FOR ANY OTHER PURPOSE EXCEPT AS AUTHORIZED IN WRITING BY DANIELS MANUFACTURING. MUST BE RETURNED TO DANIELS MANUFACTURING CORP. ON COMPLETION OF ORDER OR PURPOSES FOR WHICH LENT.

DRN. KIRK C KOONS	DATE 12/15/2006	INTERPRET PER ASME Y14.5M-2018			
CHK'D RRR	DATE 12/15/2006	 DANIELS MANUFACTURING CORP. ORLANDO, FLORIDA CAGE 11851			
APP'D	DATE				
NOTE: THIS DRAWING IS AN OUTLINE DRAWING OF THE RESPECTIVE DMC PART NUMBER INDICATED.		TITLE HYDRAULIC POWER UNIT, AIR ENVELOPE DRAWING			
		WHERE USED:			
		SIZE B	SCALE N.T.S.	CAD NO. HPU11M (M5259/2-06)_ENV PART NO. HPU11M (M5259/2-06)	SHEET 1 OF 1 REV. 2